

livesound >

portablesound

installedsound

Features

- Bandpass design
- High efficiency
- Pole mount socket

Applications

- Theatre
- Front of house
- Houses of worship
- Corporate / industrial

B-18 bandpass subwoofer




The B-18 is a single 18" bandpass subwoofer enclosure designed to work in conjunction with Turbosound LMS series loudspeaker management systems, providing optimum system performance. NuQ systems can be controlled over a BVNet network using TurboDrive™ control software.

The B-18 consists of a custom 18" neodymium low frequency driver in a bandpass enclosure optimally tuned for extended low frequency response. The cabinet is finished in black or optional white semi-matt textured paint. Heavy duty corner protectors are fitted, and recessed flush handles are provided for easy lifting and carrying. An integral pole mount socket is fitted to the top of the enclosure to allow two-way cabinets to be mounted at the correct height above the subwoofer. Internal M10 rigging points are fitted on the sides, top and bottom to enable rigging in fixed installations. A rear panel connector plate carries two Speakon NL4 connectors for loop in and loop out connections to additional enclosures.

NuQ
series

Frequency Response

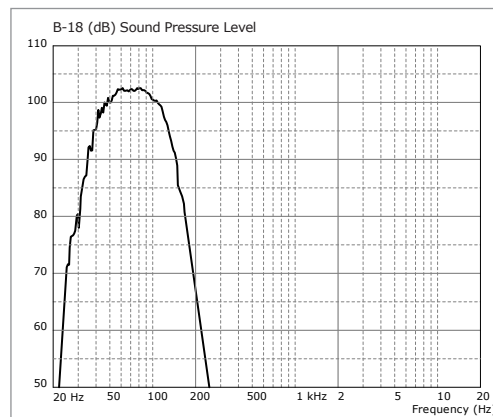


TURBOSOUND Ltd
Star Road
Partridge Green
West Sussex
RH13 8RY
United Kingdom

t: +44 (0)1403 711447
f: +44 (0)1403 710155
e: techsupport@turbosound.com
w: www.turbosound.com

B-18

bandpass subwoofer

DIMENSIONS (HxWxD)	768mm x 574mm x 700mm (30.2" x 22.6" x 27.6")	
NET WEIGHT	62kg (136.4lbs)	
COMPONENTS	1 x 18" (457mm) LF driver	
FREQUENCY RESPONSE	40Hz - 150Hz ±4dB	
POWER HANDLING	600 watts continuous, 1200 watts program	
SENSITIVITY	102dB, 1 watt @ 1 metre	
MAXIMUM SPL	130dB continuous, 136dB peak	
NOMINAL IMPEDANCE	8 ohms	
CONSTRUCTION	18mm (3/4") birch plywood, finished in black semi-matt textured paint	
CONNECTORS	(2) Speakon NL4MP, wired pin 1+: positive, pin 1-: negative; pin 2+ and pin 2-: n/c	
OPTIONS	White textured paint	
SPARES AND ACCESSORIES	LS-1814	18" (457mm) LF loudspeaker
	RC-1814	Recone kit
	T-4	Heavy duty wheels (set of four)
	PA-90	90cm straight pole
	PA-120	120cm straight pole
MORE INFO	More information can be found on our website: www.turbosound.com	

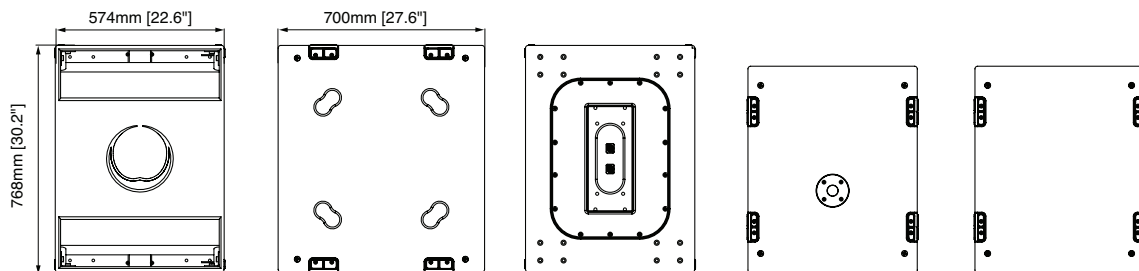

Limited Warranty

Every Turbosound loudspeaker product is warranted to the original end-user purchaser and all subsequent owners for a period of two (2) years for loudspeaker products, or one (1) year for electronics products, from the original date of purchase. Warranty coverage includes defects in materials and workmanship. It does not include:

- damage caused by accident, misuse, abuse, neglect or modification by any other person other than an authorised Turbosound representative,
- damage caused by overdriving, use with unsuitable amplifiers or amplifier failure,
- damage caused by failure to operate the product in accordance with the instructions contained in the user's manual,
- damage occurring during shipment in transit,
- claims based upon any misrepresentations by the seller,
- products which do not have the original components as specified in the product engineering information,
- products on which the serial number has been removed or defaced.

Should any fault develop with a component of your Turbosound system, please return the product, freight pre-paid, in its original packing carton, along with proof of purchase such as the original bill of sale, and a description of the suspected fault, to your local authorised Turbosound representative. The product serial number must be quoted in all correspondence relating to the claim. Insurance is recommended as Turbosound or its representatives are not liable for loss or damage in transit.