

livesound >

portablesound

installedsound

Features

- CEW™ technology
- Bent plywood construction
- Rotatable HF waveguide
- Compact enclosure
- Multiple rigging points
- OmniMount™ compatible
- Pole mount socket

Applications

- Front of house
- Floor monitoring
- Dry hire and rental
- Theatre
- Audio-visual
- Houses of worship
- Corporate / industrial

NuQ-8 compact passive 2-way loudspeaker




The NuQ-8 is a compact passive full range two-way loudspeaker system designed to be used with Turbosound LMS series digital loudspeaker management systems, providing optimum system performance. NuQ systems can be controlled over a BNet network using TurboDrive™ control software.


It consists of a front loaded 8" neodymium LF driver and a 1.4" neodymium HF compression driver on a rotatable 80°H x 50°V Converging Elliptical Waveguide™, matched with an internal passive crossover network in a reflex-loaded enclosure, giving excellent pattern control and allowing a swap of horizontal and vertical coverage patterns. The trapezoidal enclosure is uniquely formed out of pre-bent plywood, which entirely eliminates four cabinet joints and provides additional benefits of superior strength, low weight and reduced internal reflections. The symmetrical shape creates an additional role as mirrored left/right monitor wedges. The cabinet includes a steel mesh grille backed with reticulated foam, and is finished in black or optional white textured paint, and includes rigging points for use with optional flying yokes and wall brackets, as well as being compatible with OmniMount™ loudspeaker brackets. A pole mount socket is fitted for use with 35mm poles and speaker stands. The rear panel connector plate carries two Neutrik Speakon NL4MP connectors for loop in and loop out connections to additional enclosures.

NuQ series

Frequency Response

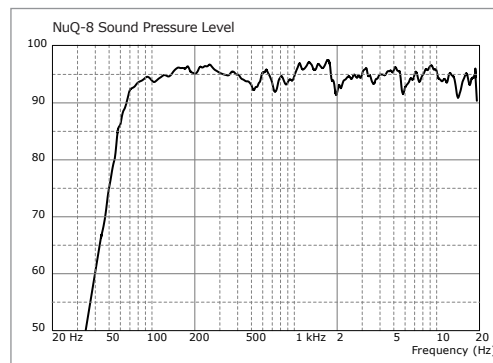

Beamwidth

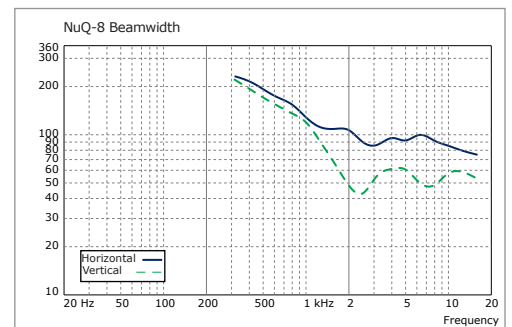


TURBOSOUND Ltd
Star Road
Partridge Green
West Sussex
RH13 8RY
United Kingdom

t: +44 (0)1403 711447
f: +44 (0)1403 710155
e: techsupport@turbosound.com
w: www.turbosound.com

NuQ-8 compact passive 2-way loudspeaker

DIMENSIONS (HxWxD)	464mm x 272mm x 220mm (18.3" x 10.7" x 8.7")																				
NET WEIGHT	10kg (22lbs)																				
COMPONENTS	1 x 8" (203mm) LF driver, 1 x 1" (25mm) HF driver on a Converging Elliptical Waveguide™																				
FREQUENCY RESPONSE	60Hz - 20kHz ±4dB																				
NOMINAL DISPERSION	100°H x 60°V @ -6db points. Rotatable waveguide allows swap of horizontal and vertical pattern																				
POWER HANDLING	250 watts continuous, 500 watts program																				
SENSITIVITY	94dB, 1 watt @ 1 metre																				
MAXIMUM SPL	118dB continuous, 124dB peak																				
NOMINAL IMPEDANCE	8 ohms																				
CROSSOVER	Internal passive crossover at 4kHz																				
CONSTRUCTION	12mm (1/2") birch plywood, finished in black semi-matt textured paint																				
GRILLE	Powder coated perforated steel with acoustically transparent reticulated foam																				
CONNECTORS	(2) Speakon NL4MP, wired pin1+: positive, pin1-: negative, pins 2+ and 2- n/c																				
RIGGING	M8 rigging points for WB-20B wall brackets and OmniMount™ 20.5 series brackets M8 rigging points for NuQ-SB8 swivel brackets M10 rigging points for NuQ-FY8 flying yokes and EB-10 shoulder eyebolts																				
OPTIONS	White textured paint																				
SPARES AND ACCESSORIES	<table border="0"> <tr> <td>LS-8093</td> <td>8" (203mm) LF loudspeaker</td> </tr> <tr> <td>RC-8093</td> <td>Recone kit</td> </tr> <tr> <td>CD-115</td> <td>1" (25mm) HF compression driver</td> </tr> <tr> <td>RD-115</td> <td>Replacement HF diaphragm</td> </tr> <tr> <td>PX-NuQ8</td> <td>Crossover network</td> </tr> <tr> <td>MG-NuQ8</td> <td>Replacement grille</td> </tr> <tr> <td>WB-20B</td> <td>Wall bracket</td> </tr> <tr> <td>NuQ-FY8</td> <td>Flying yoke</td> </tr> <tr> <td>NuQ-SB8</td> <td>Swivel bracket</td> </tr> <tr> <td>PB-55</td> <td>Wall bracket, pole mount fixing</td> </tr> </table>	LS-8093	8" (203mm) LF loudspeaker	RC-8093	Recone kit	CD-115	1" (25mm) HF compression driver	RD-115	Replacement HF diaphragm	PX-NuQ8	Crossover network	MG-NuQ8	Replacement grille	WB-20B	Wall bracket	NuQ-FY8	Flying yoke	NuQ-SB8	Swivel bracket	PB-55	Wall bracket, pole mount fixing
LS-8093	8" (203mm) LF loudspeaker																				
RC-8093	Recone kit																				
CD-115	1" (25mm) HF compression driver																				
RD-115	Replacement HF diaphragm																				
PX-NuQ8	Crossover network																				
MG-NuQ8	Replacement grille																				
WB-20B	Wall bracket																				
NuQ-FY8	Flying yoke																				
NuQ-SB8	Swivel bracket																				
PB-55	Wall bracket, pole mount fixing																				
MORE INFO	More information can be found on our website: www.turbosound.com																				

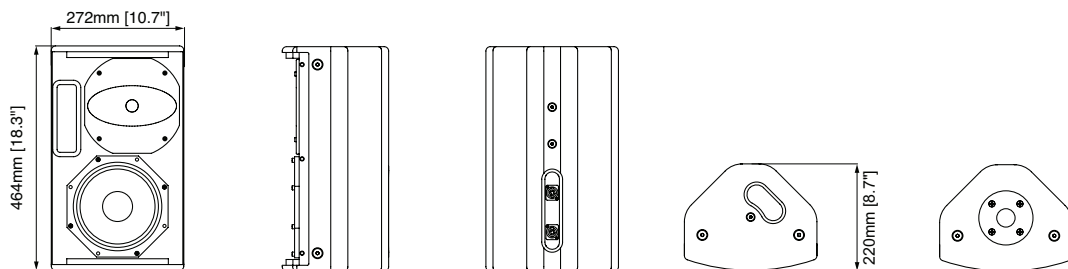

Limited Warranty

Every Turbosound loudspeaker product is warranted to the original end-user purchaser and all subsequent owners for a period of two (2) years for loudspeaker products, or one (1) year for electronics products, from the original date of purchase. Warranty coverage includes defects in materials and workmanship. It does not include:

- damage caused by accident, misuse, abuse, neglect or modification by any other person other than an authorised Turbosound representative,
- damage caused by overdriving, use with unsuitable amplifiers or amplifier failure,
- damage caused by failure to operate the product in accordance with the instructions contained in the user's manual,
- damage occurring during shipment in transit,
- claims based upon any misrepresentations by the seller,
- products which do not have the original components as specified in the product engineering information,
- products on which the serial number has been removed or defaced.

Should any fault develop with a component of your Turbosound system, please return the product, freight pre-paid, in its original packing carton, along with proof of purchase such as the original bill of sale, and a description of the suspected fault, to your local authorised Turbosound representative. The product serial number must be quoted in all correspondence relating to the claim. Insurance is recommended as Turbosound or its representatives are not liable for loss or damage in transit.